



SCIENTIFIC AND TECHNICAL JOURNAL  
Namangan Institute of Engineering and Technology

«STUDY OF THE STRUCTURE AND PROPERTIES OF POLYVINYL  
CHLORIDE FILLED WITH BAZALT MINERAL»

Tojiev Panji	Associate Professor
Turaev Xayit	Professor
Nuraliyev Gayrat	Teacher
Djalilov Abdilaxat	Academician

Termez State University  
Tashkent Scientific Research Institute of Chemical Technology

<https://doi.org/10.5281/zenodo.7950975>



ISSN 2181-8622

**Manufacturing technology problems**



**Scientific and Technical Journal  
Namangan Institute of  
Engineering and Technology**

**Volume 8  
Issue 1  
2023**



14. Tal'At, A., Doniyor, S., & Khayrullakhan, A. (2022). Obtaining a new type of hydrogel by polymerizing farpan with formalin and various additives. *Universum: технические науки*, (4-13 (97)), 9-13.
15. Шеркузиев, Д. Ш., & Арипов, Х. Ш. (2020). Влияние гидрогеля на механический состав и агрохимические свойства неорошаемых почв. *ВВК*, 79, 859.
16. Abduhakimov, T., Sherkuziev, D., & Aripov, X. (2023, March). Obtaining of complex hydrogel fertilizers with moisture-retaining NPK based on local raw materials. In *IOP Conference Series: Earth and Environmental Science* (Vol. 1142, No. 1, p. 012055). IOP Publishing.
17. Shermamatovich, S. D., Davlatovich, S. S., Orifjonovich, Y. M., & Oydin, A. (2018). Hydrogel production of new generation based on local raw materials. *European Science Review*, 1(11-12), 141-145.
18. Sherkuziev, D. S., Aripov, K. S., Alimov, U. K., & Maxmudova, M. A. (2020, December). Research of agrochemical and mechanical properties of soils processed with hydrogel. In *IOP Conference Series: Earth and Environmental Science* (Vol. 614, No. 1, p. 012121). IOP Publishing.
19. Sherkuziev, D., Mamadrakhimov, A., Aripov, K., Mutalliev, L., & Namozaliev, A. (2021). Obtaining of hydrogel polymer by polymerization of hydrolyzed polyacrylonitrile with formalin in the presence of glycerin. *German International Journal of Modern Science*, (9), 7-10.
20. Sherkuziev, D. S., Shirinov, S. D., Yusupov, M. O., & Asqarova, O. (2018). Hydrogel production of new generation based on local raw materials. *European Sciences review. Scientific journal*, 1(11-12), 141.

UDC 678.01

## STUDY OF THE STRUCTURE AND PROPERTIES OF POLYVINYL CHLORIDE FILLED WITH BAZALT MINERAL

**TOJIEV PANJI**

Termez State University

**TURAEV X**

Termez State University

**NURALIYEV G**

Termez State University

**DJALILOV A**

Tashkent Scientific Research Institute of Chemical Technology

**Abstract:**

**Objective.** At present, many scientific results are being achieved in our country on the use of local mineral fillers in the field of composite materials production. To date, the use of mineral products for the protection of polymeric materials and building horse fires and various aggressive environments is one of the urgent tasks.

The purpose of the work is to obtain heat-resistant and mechanically strong thermoplastic composite materials by filling polyvinyl chloride with basalt mineral.

**Methodology.** The physical and mechanical properties of filled polyvinyl chloride (PVC) composites were studied, the melt flow index was determined by the viscometric method, the bending strength was

determined by the double-sided bending method, and the impact strength was determined by the Charpy method.

**Results.** The physico-mechanical and thermophysical properties of polyvinyl chloride filled with basalt-containing mineral have been studied.

**Conclusion.** To obtain a composite material based on PVC, the content of fillers was changed from 1 mass to 5 mass parts. An assessment of the rheological properties of filled composites showed that with an increase in the basalt content, the fluidity of the compositions decreases, however, the resulting compositions can be processed by injection molding. The data obtained show that the optimal compositions are those containing: 5 wt.h. basalt fillers.

The developed materials were studied for flammability by the oxygen index method, and thermophysical properties by the DTGA method.

**Keywords:** polyvinyl chloride, basalt fibers, atomic force microscopy, physicochemical and mechanical properties.

**Introduction.** Today, the modern development of the economy increases the demand for thermoplastic polymeric materials, but manufacturers cannot satisfy the needs of consumers in polymeric materials used in various fields [1]. By introducing various mineral additives into the composition of polymers, it is possible to significantly improve the quality of polymers and the properties of composite materials based on them, which makes it possible to expand their range and scope. [2-5].

Currently, there are various types of mineral fillers for polymers, and their number is increasing every year, which makes it possible to expand the scope of polymeric materials.

The development of the modern economy requires the production of polymer composite materials not only with high properties, but also with low prices. Therefore, to improve the properties of composite materials, it is advisable to use basalt and basalt fibers, which are cheap and effective fillers.

One of the unique properties of basalt is that it is refractory and can withstand temperatures up to 900<sup>0</sup>C-1400<sup>0</sup>C, resistant to chemical and mechanical stress, has high thermal insulation properties, biological stability, and chemical neutrality - resistant to aggressive acidic and alkaline environments, does not accumulate radiation. Basalt minerals are an environmentally friendly material, harmless to humans and animals [6].

**Methods and materials.** The object of study was a thermoplastic composite

material based on polyvinyl chloride. The melt flow index was determined according to GOST 11645-73 at a load of 2.16 kg and a temperature of 463 and 503 K. To determine the melt flow index, an IIRT-M brand viscometer with a capillary length and diameter of 8 and 2.09 mm, respectively, was used. The bending was determined by the two-pore bending method according to GOST 6806-73.

**Results and discussion.** In this work, the problem of improving the mechanical properties of composite materials based on polyvinyl chloride filled with basalt-containing fillers was solved.

The aim of the work is to obtain composite materials based on polyvinyl chloride filled with basalt-containing fillers and to study their physical and mechanical properties [8].

Development of studies of the obtained materials based on polyvinyl chloride containing nanoscale modifiers that affect the supramolecular structure of polymer macromolecules and thus its physical and mechanical characteristics.

**Experimental part.** Chemical modification by introducing new functional groups into the polyvinyl chloride macromolecule and the study of their physico-mechanical and chemical properties from a scientific and practical point of view are of great importance [9].

We used basalt from the Asmansay deposit in the Jizzakh region, the composition of which is given in Table 1.

The development of basalt rocks from the Asmansay deposit in the Jizzakh region



fully meets the republic's need for mineral fiber and exports it abroad [7].

Table 1.

**Chemical composition of basalt from the Asmansay deposit**

Component	Content, % wt. basalt
Silicon oxide SiO <sub>2</sub>	47,0
Magnesium oxide, MgO	16,3
Aluminum oxide Al <sub>2</sub> O <sub>3</sub>	11,2
Iron oxide Fe <sub>2</sub> O <sub>3</sub>	10,3
Calcium oxide, CaO	8,94
Sodium oxide, Na <sub>2</sub> O	1,53
Potassium oxide, K <sub>2</sub> O	0,33
Iron oxide FeO	0,16
Titanium oxide TiO <sub>2</sub>	0,57
Manganese oxide MnO	0,19
Sulfur oxide, SO <sub>3</sub>	less 0,05
Other rock impurities	2,04

To obtain a composite material, the basalt mineral was crushed in a ball mill for 5 hours to 140 μm, and polyvinyl chloride (PVC) was used as a binder.

When choosing the optimal filler particle size, basalt minerals were used in the composition of PVC-based composite materials with particle sizes of 125 and 315 μm, and their physical and mechanical properties were studied.

The amount of dispersed fillers in the polymer matrix was 40%. This amount is the

optimal composition for composite materials based on basalt mineral and polyvinyl chloride [8].

The rheological properties of composite materials obtained on the basis of basalt mineral and polyvinyl chloride were determined by the melt flow index (MFR). With an increase in the amount of basalt in the composition of PCM, the melt flow decreases (Table 2), but these composites can be processed by injection molding

Table 2.

**Change in the melt flow index of the composition at 200°C depending on its composition (particle size ≤140 μm)**

The composition of the composition, wt.h., per 100 wt.h. PVC	PVC PTR, g/10min,
PVC	5,36
PVC+30basalt	3,22
PVC+40basalt	2,78
PVC+50basalt	2,15

Determination of the physico-mechanical properties of composite materials showed that as a result of the inclusion of up to 40% basalt-containing fillers in the composition, all the physico-

mechanical properties of the PVC-based polymer composite material are improved (Table 3). At the same time, it was noted that an increase in tensile strength leads to a decrease in relative elongation.

Table 3

**Comparative characteristics of the physical and mechanical properties of the developed PVC**

The composition of the composition, wt.h., per 100 wt.h. PVC	impact strength kJ/m <sup>2</sup>	Elongation at break, %	Tensile strength, MPa
PVC	29	1245	9,12
PVC+30 basalt (BT)	41,2	96,6	9,9
PVC+40 basalt (BT)	62,6	35,4	11,6
PVC+50 basalt (BT)	54,9	12	10,9

The inclusion of dispersed basalt in the polymer composition affects the combustibility of PCM, reducing the self-combustion time of the composite material by 2 times compared to the original polyvinyl chloride, and also reducing the mass loss during ignition in air by 50% (Table 4). .)

All indicators of the flammability of the polymer composite material indicate that the basalt mineral used as a filler has the ability to reduce flammability.

Atomic force microscopy (AFM) is widely used to study the topography and microstructure of various materials. This method makes it possible to form the surface of a sample obtained in the nanoscale range on a three-dimensional surface. The results obtained show a change in the size, shape, surface of particles and mechanical properties of particles on the surface of a polymer composite material [13].


Table 4

**The influence of the amount of basalt on the flammability of polyvinyl chloride**

The composition of the composition, wt.h., per 100 wt.h. PVC	Weight loss upon ignition in air, %	Self-burning time, sec.
PVC	55	236
PVC+40 basalt(BT)	23	123
PVC+50 basalt(BT)	21	112

Using this method, the effect of modified filler particles on the polymer surface morphology was studied. The study and analysis of the surface of the

modified polyvinyl chloride shows the distribution of dispersed basalt between polymer macromolecules and the features of their interaction. [14-15].

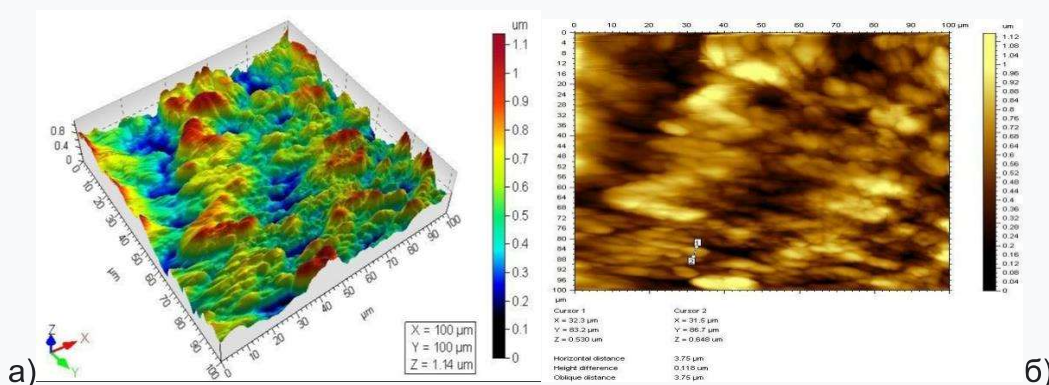

**Figure 1. PVC + 40%BT: A) - three-dimensional image, B) - two-dimensional image**

The size of the scanning range was 1-50 μm. On fig. Figure 1 shows the surface of a composite material containing PVC + 40% BT modified with dispersed basalt.

The results show that the surface roughness of the original PVC is 100 nm, and the surface roughness of the PVC + 40% BT composite is 210 nm [16].

Thermal-oxidative properties of composite materials have been studied on the basis of thermoanalytical studies.

It is known that polymer composite materials filled with basalt minerals decompose at a higher temperature than unfilled polymers, and this decomposition is characterized by the formation of an ash residue. This indicates the thermal stability of the obtained composite materials. The

complex physical and mechanical properties of composite materials are determined on the basis of chemical changes during the processing of polymers. such as melting point change and heat resistance.

These processes take place at high temperatures. In this work, the thermal and thermophysical properties of polymer composite materials, such as the change in melting temperature and heat resistance, were studied. The melting temperature and degree of crystallization of polymer composite materials were determined by differential scanning calorimetry (DSC). The results obtained are presented in table. 5.

Table 5.

**Thermodynamic properties of composite materials based on PVC + 40% BT**

The composition of the composition	Start melting, T° C	melting peak я, T° C	Enthalpy, ΔH, Дж/г	Degree of crystallinity α, %
PVC	160	224	188	55
PVC+30% BT	186	243	198	61
PVC+40% BT	197	245	204	59
PVC+550% BT	209	246	210	58

To determine the range of operating temperatures of polymer composite materials by differential scanning calorimetry (DSC), thermograms of the samples were taken.

A comparative analysis of the diffraction spectra of composite materials on fillers showed that the greater the interlayer distance of the modified fillers and the higher the filler concentration, the higher the diffusion rate of the filler included in the composition. Also, the degree of dispersion of fillers in the polymer depends on the duration of mixing of the components and the viscosity of the solution.

Accurate results can be obtained by experimental study of the size and shape of

particles by X-ray phase analysis (Debye-Scherrer method). The size of coherent distribution zones (CZR) (the size of nanocrystals) is determined by the Debye-Scherrer formula:

$$D_p = K \lambda / (B \cos \theta)$$

Dp is the average crystal size (nm) K-Scherrer constant. K varies from 0.68 to 2.08. For spherical crystals with cubic symmetry K = 0.94.

Wavelength λ -beams Cu Ka = 1.54178 Å.

B is the integral length of the reflections in the FWHM diffractometer (full width at half maximum). cosθ - cosine angle of X-ray diffraction.

Table 6.

### **Results of calculating the size of composite nanoparticles based on PVC + 40% BT according to the Debye-Scherrer formula**

№	2theta-Scan Angle	FWHM-integral reflection width	Dp (nm) average crystallite size	Dp (nm) average
1	8.3	0.5	17.42	
2	8.7	0.6	14.61	15.61
3	21.4	0.65	15.12	
4	24.5	0.64	15.70	
5	26.4	0.66	15.23	

According to the results of X-ray phase analysis, it was found that the particle size in the obtained composite materials is nanosized.

Thus, the maximum amount of basalt mineral added as a filler to improve the physical and mechanical properties of polymer composite materials based on polyvinyl chloride was 40%.

All the obtained results showed that the addition of 40% dispersed basalt to polymers increases the strength and thermal stability of polymers.

**Conclusion.** Thus, an increase in the physical, mechanical and thermophysical

properties of polyvinyl chloride filled with dispersed basalts is most effective when using PVC + 40% BT.

Composite materials based on polyvinyl chloride with mineral fillers and surfactants can be widely used as effective heat-resistant polymeric materials.

The phase structure of polyvinyl chloride modified with dispersed basalts can be explained by strong adhesion between the polymer base and fillers.

Modification of the polymer with mineral fillers leads to an increase in their fire resistance.

### **References**

1. Umarov Sh.Sh., Tojiyev P.J., Turaev Kh.Kh., Jalilov A.T. Structure and properties of polymers filled with metal oxides // Tashkent : Uzbek chemical journal, 2021, №4, bet -pp.18-24 (in Russian)
2. Dusanov R.Kh., Tozhiev P.Zh., Turaev Kh.Kh., Jalilov A.T. Structure and properties of polyamide-6 filled with vermiculite Universum: chemistry and biology: electronic scientific journal. -2020.-№10(76). pp. 54-57 (in Russian)
3. GOST 11645-73. Plastics. Method for determining the melt flow rate of thermoplastics. Enter. from 01.01.1975. M. : p. 12 (in Russian)
4. GOST 9550-81 (Plastics. Methods for determining the modulus of elasticity in tension, compression and bending) Vved. from 26.08.1981 p. 15(in Russian)
5. GOST 4647-80. Plastics. Method for determining the Charpy impact strength. Enter. from 01.06.1981, S.27(in Russian)
6. GOST 11262-80. Plastics. Tensile test method. Enter. from 01.12.1980, P.16 (in Russian)
7. GOST 4651-2014. Plastics. Compression test method. Enter. from 01.03.2015. M. : Standartinform, 2014, S.20 (in Russian)
8. Chukov N.A. Composite materials based on polypropylene and nanoscale fillers: dissertation for a candidate of technical sciences: - Nalchik, 2011. - 110 p. : ill. RSL OD, 61 11-5 / 1845 (in Russian)
9. Henini M., Quantum Dot Nanostructures // Materials Today. - 2002. - V. 48. -P. 140-142. (in English)
10. Kiviranta L., Kumpulainen S. Quality Control and Characterization of Bentonite Materials // PosivaOY.– 2011. - P.102. (in English)



11. Egorova O.V. Directed regulation of the structure and properties of polyethylene filled with dispersed fillers / OV Egorova, Yu.A. Kadykova, S.E. Artemenko // Plastic mass. - 2012. - No. 4. - S. 57-59. (in Russian)
12. Tojiev P.J., Normurodov B.A., Turaev Kh.Kh., Nurkulov F.N. \*, Jalilov A.T. \* Study of the physical and mechanical properties of highly filled polyethylene compositions // UNIVERSUM: Chemical technology: electronic scientific journal 2018 No. 2 (47). (in Russian)
13. Mozzhukhin V.B. Influence of technological equipment and technology for obtaining highly filled compositions based on polyolefins on their physical and mechanical properties / VB Mozzhukhin et al. // Plastics. - 2013. - No. 1. - P. 54–56.
14. B.A. Normurodov, P.J. Tojiev, Kh.Kh. Turaev, A.T. Djalilov, F.N. Nurkulov Study of physical and mechanical properties of basalt-containing polyethylene compositions // Tashkent: Composite materials-2017.-№ 4.-C.10-12 (in Russian)
15. B.A. Normurodov, P.J. Tojiev, Kh.Kh. Turaev, A.T. Djalilov Synthesis and IR-spectroscopic study of sulfur-containing oligomer// UNIVERSUM: Chemistry and Biology: electronic scientific journal 2018 No. 2 (44). (in Russian)
16. Kryzhanovsky, V.K. Production of products from polymer materials textbook / VK Kryzhanovsky and [others]. - SPb. : Profession, 2014 .-- 592 p. (in Russian)
17. Bredikhin P.A., Kadykova Yu.A. Investigation of the properties of PCM filled with dispersed basalt // V International student electronic scientific conference "Student scientific forum" - 2013. (in Russian)
18. Kerber M.L., Bukanov A.M., Wolfson S.I., Gorbunova I.Yu., Kandyrin L.B., Sirotka A.G., Sheryshev M.A. Physical and chemical processes in the processing of polymers. - SPb.: Nauchnye osnovy i tekhnologii, 2013.
19. Guseva M.A., Structure and physical-mechanical properties of nanocomposites on the basis of non-polar polymers and layered silicates: Autoref. Dis. Cand. phys.-math. science Moscow: INXS RAN, 2004.
20. Kompozity na osnove polyolefinov / Pod ed. D. Nwabunmy, T. Cue. Per. s engl..- SPb.: NOT, 2014.
21. Osama Abdulkarim Al Khelo Materialy na osnove polypropylene with adjustable properties. Dissertation. sugar tech. science Moscow: RXTU, 20014.
22. Shitov D.Yu., Kravchenko T.P., Osipchik V.S., Rakov E.G. Kompozitnye materialy na osnove polypropylenea s korbonnymi nanopolnitelyami // Plasticheskie massy, No. 2, 2013. S. 29-33.

UDC 667.287.5

## INVESTIGATION OF PHTHALOCYANINE DIAMIDOPHOSPHATE-COPPER BY THERMAL ANALYSIS

**YUSUPOV MUZAFAR**

PhD of Namangan Institute of Engineering and Technology  
E-mail: [muz.yusupov90@gmail.com](mailto:muz.yusupov90@gmail.com), phone: (+99893) 570-77-54

**Abstract:** The article presents the results of a study of the synthesis of a new type of pigment - copper phthalocyanine diphosphate (DAPCuPc), which contains macroheterocyclic compounds. The influence of the method of obtaining a pigment in the liquid and solid phases on its physicochemical properties and intensity has been studied. The gross formula of the pigment is given and the areas of its practical application are shown. Thermal analysis on a Setaram LabSys Evo instrument (France) was used to study the thermal stability of a highly intense pigment of the organic copper phthalocyanine pigment, which was compared with the closest analog, the copper phthalocyanine pigment. The results of the mass

## C O N T E N T S

### PRIMARY PROCESSING OF COTTON, TEXTILE AND LIGHT INDUSTRY

<b>A.Shodmonkulov, R.Jamolov, X.Yuldashev</b>	
Analysis of load changes in the chain drive during the drying process of cotton falling from the longitudinal shelves of the drum.....	3
<b>A.Xomidjonov</b>	
Influence and characteristics of drying mechanisms in leather production on the derma layer.....	8
<b>J.Monnopov, J.Kayumov, N.Maksudov</b>	
Analysis of elastic fabrics for compression sportswear in the new assortment	13
<b>S.Matismailov, K.Matmuratova, Sh.Korabayev, A.Yuldashev</b>	
Investigation of the influence of speed modes of the combined drum on the quality indicators of the tape.....	18
<b>A.Shodmonkulov, K.Jumaniyazov, R.Jamolov, X.Yuldashev</b>	
Determination of the geometric and kinematic parameters of the developed chain gear for the 2SB-10 dryer.....	23
<b>R.Jamolov, A.Shodmonkulov, X.Yuldashev</b>	
Determination of dryer drum moisture extraction depending on its operating modes.....	27
<b>A.Djuraev, K.Yuldashev, O.Teshaboyev</b>	
Theoretical studies on screw conveyor for transportation and cleaning of linter and design of constructive parameters of transmissions.....	29
<b>S.Khashimov, Kh.Isakhanov, R.Muradov</b>	
Creation of technology and equipment for improved cleaning of cotton from small impurities.....	36
<b>G.Juraeva, R.Muradov</b>	
The process of technical grades of medium staple cotton at gin factories and its analysis.....	40
<b>I.Xakimjonov</b>	
Literature analysis on the research and development of the method of designing special clothes for workers of metal casting and metal processing enterprises.....	44
<b>GROWING, STORAGE, PROCESSING AND AGRICULTURAL PRODUCTS AND FOOD TECHNOLOGIES</b>	
<b>A.Khodjiev, A.Choriev, U.Raximov</b>	
Improving the technology of production of functional nutrition juices.....	49
<b>U.Nishonov</b>	
Research in beverage technology intended to support the functions of the cardiovascular system.....	53
<b>Z.Vokkosov, S.Hakimov</b>	

Development of new types of vegetable juices and beverages technology...	59
<b>CHEMICAL TECHNOLOGIES</b>	
<b>M.Latipova</b>	
Analysis of the current status of thermoelectric materials and technology for obtaining and manufacturing half-elements.....	66
<b>G.Ochilov, I.Boymatov, N.Ganiyeva</b>	
Physico-chemical properties of activated adsorbents based on logan bentonite.....	72
<b>U.Nigmatov</b>	
Simulation of heat transfer process in absorber channels.....	77
<b>T.Abduxakimov, D.Sherkuziev</b>	
Procurement of local raw materials complex fertilizers with nitrogen-phosphate-potassium containing moisture.....	84
<b>P.Tojiyev, X.Turaev, G.Nuraliyev, A.Djalilov</b>	
Study of the structure and properties of polyvinyl chloride filled with bazalt mineral.....	89
<b>M.Yusupov</b>	
Investigation of phthalocyanine diamidophosphate- copper by thermal analysis.....	95
<b>L.Oripova, P.Xayitov, A.Xudayberdiyev</b>	
Testing new activated coals AU-T and AU-K from local raw materials when filtration of the waste mdea at gazlin gas processing plant.....	101
<b>N.Kurbanov, D.Rozikova</b>	
Based on energy efficient parameters of fruit drying chamber devices for small enterprises.....	107
<b>MECHANICS AND ENGINEERING</b>	
<b>U.Erkaboev, N.Sayidov</b>	
Dependence of the two-dimensional combined density of states on the absorbing photon energy in GaAs/AlGaAs at quantizing magnetic field.....	113
<b>I.Siddikov, A.Denmuxammadiyev, S.A'zamov</b>	
Investigation of electromagnetic current transformer performance characteristics for measuring and controlling the reactive power dissipation of a short-circuited rotor synchronous motor.....	125
<b>Sh.Kudratov</b>	
Evaluation and development of diagnostics of the crankshaft of diesel locomotives.....	130
<b>Z.Khudoykulov, I.Rakhmatullaev</b>	
A new key stream encryption algorithm and its cryptanalysis.....	135
<b>T.Mominov, D.Yuldoshev</b>	
Coordination of the movement of transport types in areas with high passenger flow.....	146
<b>R.Abdullayev, M.Azambayev, S.Baxritdinov</b>	

Analysis of research results according to international standards.....	152
<b>R.Abdullayev, M.Azambayev</b>	
Cotton fiber rating, innovation current developments, prospects for cooperation of farms and clusters.....	157
<b>F.Dustova, S.Babadzhanov.</b>	
Calculation of the load on the friction clutch of the sewing machine.....	163
<b>Z.Vafayeva, J.Matyakubova, M.Mansurova</b>	
Improvement of the design of the shuttle drum in the sewing machine.....	168
<b>A.Obidov, M.Vokhidov</b>	
Preparation of a new structure created for sorting of ginning seeds.....	174
<b>Sh.Mamajanov</b>	
Carrying out theoretical studies of the cotton regenerator.....	181
<b>ADVANCED PEDAGOGICAL TECHNOLOGIES IN EDUCATION</b>	
<b>A.Khojaev</b>	
Methodological issues of organizing internal audits and control of off-budget funds in higher education institutions.....	188
<b>I.Nosirov</b>	
Theoretical foundations of establishing new technologies on personal management system.....	192
<b>Z.Mamakhanova, D.Ormonova</b>	
Specific characteristics of uzbek national art of embroidery.....	198
<b>A.Raximov, M.Khusainov, M.Turgunpulatov, S.Khusainov, A.Gaybullayev</b>	
Energy-saving modes of the heat treatment of concrete.....	202
<b>ECONOMICAL SCIENCES</b>	
<b>M.Bekmirzayev, J.Xolikov</b>	
Prospects for the development of service industries.....	211
<b>A.Ilyosov</b>	
Organizational and economic mechanisms to support the export of industrial products: a comparative analysis of foreign experience and proposals.....	216
<b>I.Foziljonov</b>	
The importance of multiplier indicators in assessing the effectiveness of the cash flow of the enterprise.....	221
<b>K.Kurpayanidi</b>	
Innovative activity of business entities in the conditions of transformation: a retrospective analysis.....	227
<b>Sh.Muxitdinov</b>	
Main characteristics of the risk management mechanism in manufacturing enterprises.....	237
<b>Y.Najmiddinov</b>	
Green economy and green growth. initial efforts of sustainable development in Uzbekistan.....	241



---

<b>E.Narzullayev</b>	
The methods for measuring the effectiveness of social entrepreneurship activity.....	<b>248</b>
<b>E.Narzullayev</b>	
Analysis of the management and development of environmental social entrepreneurship in Uzbekistan.....	<b>254</b>
<b>F.Bayboboeva</b>	
Legal regulation of entrepreneurial activity.....	<b>259</b>
<b>Z.Boltaeva</b>	
Foundations of neuromarketing strategy in industry.....	<b>265</b>
<b>R.Rashidov</b>	
Issues of regional development of small business.....	<b>270</b>
<b>Sh.Abdumurotov</b>	
Methodology for forecasting the competitiveness of an enterprise based on the Elliott wave principle.....	<b>277</b>
<b>S.Goyipnazarov</b>	
Assessment of impact of artificial intelligence on labor market and human capital.....	<b>288</b>
<b>A.Norov</b>	
Evolution of management science.....	<b>296</b>
<b>K.Narzullayev</b>	
Investment process in the republic of Uzbekistan.....	<b>306</b>
<b>Kh.Irismatov</b>	
Statistical analysis of assessment of the volume of the hidden economy in the republic of Uzbekistan.....	<b>311</b>

---



**“SCIENTIFIC AND TECHNICAL JOURNAL OF  
NAMANGAN INSTITUTE OF ENGINEERING AND  
TECHNOLOGY”**



**The editorial was typed and paginated in the computer center  
Paper format A4. Size 20 conditional printing plate**

**The copy must be taken from the "Scientific and Technical Journal of the  
Namangan Institute of Engineering and Technology"**