

ISSN 2181-8622

Manufacturing technology problems



Scientific and Technical Journal Namangan Institute of Engineering and Technology

INDEX  COPERNICUS
INTERNATIONAL

**Volume 10
Issue 3
2025**



THEORETIC OBSERVATION OF THE COTTON MOVEMENT IN THE OPERATING CAMERA OF THE NEW SEPARATOR

PIRNAZAROV ULUGBEK

Lecturer, Namangan State Technical University, Namangan, Uzbekistan

Phone.: (0594) 519-8989, E-mail.: upirnazarov909@gmail.com

Abstract: The Studies moving the pat product in its raw state in worker to camera of the separator to new design. In given article explored moving the pat-product in its raw state in worker to camera of the separator in new designs. Will Formed differential equation moving the pat and are received analytical decision, characterizing laws motion from time.

Keywords: Fiber, separator, cotton, Pneumatic, Mechanical, pneumamechanical, element, Drum, equipment, camera, Separation.

Introduction. The initial procession of the cotton includes a number of technological processes (piling, keeping, carrying, drying, cleaning, separating fiber and so on) and is a unique technological chain. This chain is related to the efficiency of each equipment and work quality of machines in it. Considering this matter, it can be concluded that technological chain equipment have a vast impact on the quality of the cotton [1].

In cotton processing plants, cotton is usually carried by pipes using air. Possibility of the distribution of the cotton to any direction and to arranged places and without any damage made this technology to be widespread in the cotton procession industry [2].

It is important to study the influence of the operating parts of the separator that is considered the main element of the machine which carries cotton through air. The particles of the cotton in the operating camera of the separator hit to various surfaces and stick to them in the process of separation from the air. It will be separated using a breaker. In addition that, the cotton particles, which exit from the air and the separator, will be under the influence of the vacuum-valve propellers. Because of the result of the influence of these machines to the cotton, it is an important task to preserve the quality of the cotton by decreasing breakage of cotton and damaging fiber [3,4].

It is important to consider the preservation of the natural quality of the cotton in the process of carrying it through air. Thus, the deterioration of the cotton quality may take place in the fanning system of the technology. Therefore, the construction of the separator that separates the cotton from air was changed. In the separator, the cotton is separated based on its gravity from air and the distancing power from the center. Therefore, separators are divided into: (1) gravitational, (2) inertial, and (3) distancing from the center [5,6].

II. SIGNIFICANCE OF THE SYSTEM

The construction of the above-mentioned separators is not fully developed. The high aerodynamic forces may appear that cause the air pressure to be lost. In addition to that, the technological damage will be caused to the fiber and result in the deterioration of the cotton quality. Also, the flying of the fiber can be observed from the various holes

of surfaces. Although some research has been done in the area of studying the separation process, the process of separation of cotton from the netted surface and dropping it to the vacuum valve has not been fully studied. Considering what is mentioned above, the new separator machine that is projected and implemented into the practice has a horizontal cylindrical camera that has a material giving pipe and doubly netted and surfaced disks. There is an opening in a particular distance in the webbed disks and the passing air from the openings of the webbed disks will be directed to the air emitting pipe [7]. Under the air passing camera, emitting camera – vacuum-vale the raw cotton that comes from the webbed disks will be sent to the next process. In order to boost the productivity of the cotton, separating camera and cotton emitting camera are constructed perpendicularly and this difference of this separator makes it different from other ones. The cotton entering pipe is situated horizontally between separating camera and vacuum valve. In this case, the separating camera will have an additional pipe in its central part. The cleaners of the disks are installed so that they can clean all the surfaces at the same time [8].

III. LITERATURE SURVEY

This article studies the movement of the cotton in the separator in the operating camera through the entering pipe and the inter influence of the cotton and parts of the propelling drum. In this article, raw cotton is viewed as a system that is equally estimated and in undivided movement [9].

Aerodynamic and gravitational forces influence the cotton in the operating camera of the separator. The difference between the speed of the air current V_x and the speed of the raw cotton V_n will be determined as the following:

$$\Delta V = V_x - V_n$$

Here V_x - speed of the air current, m/sec;

V_n - speed of the raw cotton, m/sec

Because of the differences in the speed, the aerodynamic force will be created. It will be divided into F_x and into lifting aerodynamic force, F_y .

In general situation, forces with three components as a result of the current F_x, F_y, F_z and moments with components M_x, M_y, M_z will appear. In an individual situation XOY – we will examine the movement principles of the raw cotton in the coordination system.

In this case gravitation - F_x and lifting force - F_y will be identified based on this formula.

$$\begin{cases} F_x = \frac{F_m S}{2} C_x (\Delta V)^2 \\ F_y = \frac{F_m S}{2} C_y (\Delta V)^2 \end{cases} \quad (1.1)$$

Here, C_x, C_y - coefficient of the aerodynamic force;

F_m - Horizontal surface of the cotton, (m²)

S - Air pressure, kg/m³.

At the mean time the movement direction of the matter, equals F_x force. However, because this force blocks the movement in our case, it will have a direction that is opposite to the movement direction.

F_y - always force movement is perpendicular F_x - force. Flow, as a rule, fluctuating, it creates α angle with opposition force.

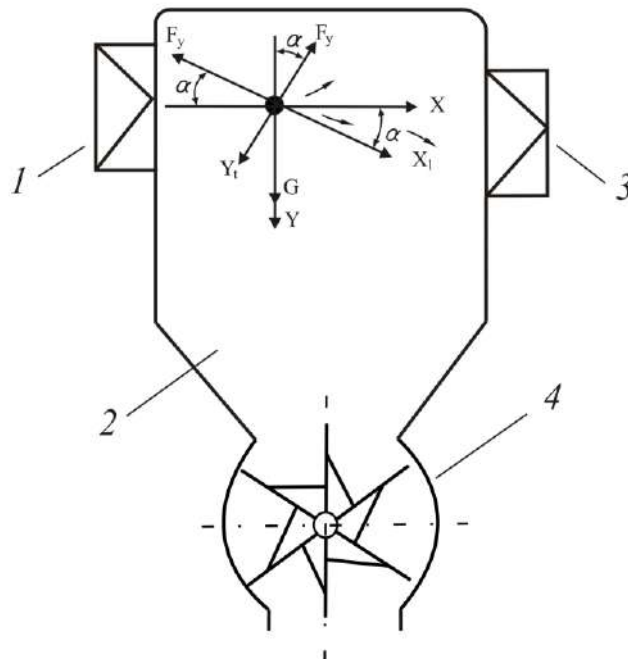


Figure 1.

OX and OY – arrows are accepted as shown in the picture. Because of the expansion of the passing horizontal parts, the speed of air current decreases. The cotton raw material will go on moving at the same speed with the initial speed. Therefore $(V-V_n)$ differences of speeds – negative suppression and air flow will decrease the movement speed of the cotton raw material. In addition to that, the cotton raw material will fall down based on the gravity force and it will be bigger in the upper part of the air current than the lower part. The lifting force will affect the upper case and it will block the cotton raw material from falling on the cells of the paddle drum of the separator [10].

In general, although V and V_n speeds are changing, in some cases the air current can be continuous.

We assume that, in a short period, it will be possible to change the forces with the following figure with lines:

$$\begin{cases} F_x = m \cdot K_x \cdot V_n \\ F_y = m \cdot K_y \cdot V_n \end{cases} \quad (1.2)$$

The lifting force will appear in symmetrical particles. The particles of the materials flow with the air in different speeds. Also, the particles of the cotton raw material are not symmetrical as per the rule. If they have at least one symmetric arrow, in that case, it will turn through the current on the plain surface. It will try to place into the symmetric arrow.

The attacking angle α is equal to zero and lifting force is also equal to zero. But this situation will not happen. Because the particles of the cotton raw material will fall into the asymmetric zone being affected by the gravitational force. They will have lifting force anew. So, the irregular flow will cause to create the lifting force. But, cotton particles, on the horizontal movement of the flow or in angle situation, inertial force will be created. The (1.2) formula should be used in the first approach; there is no sense from separating two force components flow and inertia [11, 12].

We will create a movement formula considering the forces that affect the cotton raw material [13] (Figure 1).

We will place the coordinate arrows as following: OX – arrow should be horizontal to the initial speed direction; OY arrow should be directed low vertically.

We create a differential formula of its movement principle of forces that affect the cotton raw material based on the D’Alembert principle [14]:

$$\begin{aligned} m \frac{d^2x}{dt^2} &= F_x \cdot \cos \alpha + F_y \sin \alpha \\ m \frac{d^2y}{dt^2} &= -F_x \cdot \sin \alpha + F_y \cdot \cos \alpha + G \end{aligned} \tag{1.3}$$

Here V_n – the speed of the cotton raw material, m/sec;

m – Its weight, kg;

K_x, K_y - elastic coefficients, 1/sec.;

It is possible to write the differential formula considering (1.2) and (1.3) as following:

$$\begin{cases} m \frac{d^2x}{dt^2} = -mK_x V_n \cdot \cos \alpha + m \cdot K_y V_n \cdot \sin \alpha \\ m \frac{d^2y}{dt^2} = -mK_x V_n \cdot \sin \alpha - mK_y V_n \cos \alpha + mg \end{cases} \tag{1.4}$$

We will bring (1.4) to the following state dividing both formulas by m and considering the following elements:

$$\begin{cases} V_n \cdot \cos \alpha = V_x = \frac{dx}{dt} = \dot{X} \\ V_n \cdot \sin \alpha = V_y = \frac{dy}{dt} = \dot{Y} \end{cases} \tag{1.5}$$

$$\begin{cases} \ddot{X} + K_x \dot{X} - K_y \dot{Y} = 0 \\ \ddot{Y} + K_x \dot{Y} + K_y \dot{X} - g = 0 \end{cases} \tag{1.6}$$

(1.6) we will indicate the speeds as following in the differential formulas system:

$$\dot{X} = U; \quad \dot{Y} = \omega \tag{1.7}$$

If (1.7) we consider, (1.6) it will have the following:

$$\begin{cases} \frac{dU}{dt} = -K_x U + K_y \omega \\ \frac{d\omega}{dt} = -K_x \omega - K_y U + g \end{cases} \quad (1.8)$$

(1.8) we will have the following (1.9) system of formulas by differentiating all states with the time t:

$$\begin{cases} \frac{d^2U}{dt^2} = -K_x \frac{dU}{dt} + K_y \frac{d\omega}{dt} \\ \frac{d^2\omega}{dt^2} = -K_x \frac{d\omega}{dt} - K_y \frac{dU}{dt} \end{cases} \quad (1.9)$$

We will have the system of differential formulas that are second ordered un-gendered non-changing coefficient and lined putting (1.8) to (1.9).

$$\begin{cases} \frac{d^2U}{dt^2} (K_x^2 - K_y^2) U - 2K_x K_y \omega + K_y g \\ \frac{d^2\omega}{dt^2} K_x^2 \omega + 2K_x K_y U - K_x g \end{cases} \quad (1.10)$$

In the result of entering the following elements, (1) will pass to the (1.12) second ordered un-gendered non-changing coefficient and lined differential formula.

$$\begin{aligned} a_{11} &= K_x^2 - K_y^2 & a_{21} &= 2K_x K_y \\ a_{12} &= -2K_x K_y & a_{22} &= K_x^2 \\ b_1 &= K_y g & b_2 &= K_x g \end{aligned} \quad (1.11)$$

$$\begin{cases} \frac{d^2U}{dt^2} = a_{11}U + a_{12}\omega + b_1 \\ \frac{d^2\omega}{dt^2} = a_{21}U + a_{22}\omega + b_2 \end{cases} \quad (1.12)$$

1-CASE

From (1.11) we will move on to second ordered un-gendered non-changing coefficient formula and seek its solution:

$$\begin{cases} \frac{d^2U}{dt^2} = a_{11}U + a_{12}\omega \\ \frac{d^2\omega}{dt^2} = a_{21}U + a_{22}\omega \end{cases} \quad (1.13)$$

Solutions:

$$\begin{aligned} U &= \alpha \lambda^{kt} \\ \omega &= \beta \lambda^{kt} \end{aligned} \quad (1.14)$$

$$\begin{aligned} (1.14) \rightarrow (1.13): & \left. \begin{aligned} \alpha k^2 \lambda^{kt} &= a_{11} \alpha \lambda^{kt} + a_{12} \beta \lambda^{kt} \\ \beta k^2 \lambda^{kt} &= a_{21} \alpha \lambda^{kt} + a_{22} \beta \lambda^{kt} \end{aligned} \right\} : \lambda^{kt} \\ & \left. \begin{aligned} (a_{11} - k^2) \alpha + a_{12} \beta &= 0 \\ a_{21} \alpha + (a_{22} - k^2) \beta &= 0 \end{aligned} \right\} \quad (1.15) \end{aligned}$$

α, β - in comparison will create an algebraic system of formulas.

We will find the main determinant of (1.15):

$$\Delta(k) = \begin{vmatrix} a_{11} - k^2 & a_{12} \\ a_{21} & a_{22} - k^2 \end{vmatrix} \quad (1.6)$$

If $\Delta(k) \neq 0, \alpha = 0, \beta = 0.$

Trivial solutions: $U(t) = 0, \omega(t) = 0$ will have.

To the contrary $\Delta(k) = 0$ we will find solutions that are not trivial:

$$\Delta(k) = 0 \Rightarrow \begin{vmatrix} a_{11} - k^2 & a_{12} \\ a_{21} & a_{22} - k^2 \end{vmatrix} = 0 \quad (1.7)$$

We will have (1.16) \rightarrow (1.10)- or the following characteristic formula:

$$\begin{aligned} (a_{11} - k^2)(a_{22} - k^2) - a_{12}a_{21} &= 0 \\ k^4 - (a_{11} + a_{22})k^2 - a_{12}a_{21} &= 0 \end{aligned} \quad (1.8)$$

We will find the solutions of $K^1, K^2, K^3, K^4:$

Here:

$$\left. \begin{aligned} a_{11} + a_{22} &= 2k_x^2 - k_y^2 \\ a_{12} + a_{21} &= 4k_x^2 - k_y^2 \end{aligned} \right\} \quad (1.19)$$

Special values that are similar to characteristic values: $\alpha^{(1)}, \alpha^{(2)}, \alpha^{(3)}, \alpha^{(4)}; \beta^{(1)}, \beta^{(2)}, \beta^{(3)}, \beta^{(4)}$ will be found and solution formula will as following:

$$\left. \begin{aligned} U(t) &= c_1\alpha^{(1)}\lambda^{k_1t} + c_2\alpha^{(2)}\lambda^{k_2t} + c_3\alpha^{(3)}\lambda^{k_3t} + c_4\alpha^{(4)}\lambda^{k_4t} \\ \omega(t) &= c_1\beta^{(1)}\lambda^{k_1t} + c_2\beta^{(2)}\lambda^{k_2t} + c_3\beta^{(3)}\lambda^{k_3t} + c_4\beta^{(4)}\lambda^{k_4t} \end{aligned} \right\} \quad (1.20)$$

There are solutions of one gendered differential formulas.

2-CASE

We will search the solution of the formula system that is not one gendered and differential:

$$\left. \begin{aligned} \bar{U} &= A \\ \bar{\omega} &= B \end{aligned} \right\} \quad (1.21) \quad \left(\begin{aligned} A &= const \\ B &= const \end{aligned} \right)$$

(1.21) - (1.13) will find the individual solutions:

$$\left. \begin{aligned} a_{11}A + a_{12}\beta + b_1 &= 0 \\ a_{21}A + a_{21}\beta + b_2 &= 0 \end{aligned} \right\} \left| \begin{aligned} a_{21} + a_{22} \\ -(a_{11}) - a_{12} \end{aligned} \right| +$$

$$\begin{aligned} A(a_{11}a_{22} - a_{12}a_{21}) &= -b_1a_{22} + b_2a_{12} \\ B(a_{12}a_{21} - a_{11}a_{22}) &= -b_1a_{21} + b_2a_{11} \end{aligned}$$

$$\left\{ \begin{aligned} B &= \frac{b_1a_{21} - b_2a_{11}}{a_{11}a_{22} + a_{12}a_{21}} \\ A &= \frac{b_1a_{22} - b_2a_{12}}{a_{12}a_{21} + a_{11}a_{22}} \end{aligned} \right. \quad (1.22)$$

So, the solutions of the none-one-gendered differential formula will be as following:

$$\begin{aligned} \bar{U} &= \frac{b_1 a_{22} - b_2 a_{12}}{a_{12} a_{21} + a_{11} a_{22}} \\ \bar{\omega} &= \frac{b_1 a_{21} - b_2 a_{11}}{a_{11} a_{22} + a_{12} a_{21}} \end{aligned} \quad (1.23)$$

Here: $a_{11} a_{22} - a_{12} a_{21} \neq 0$ the condition should be completed

$$\begin{aligned} (K_x^2 - K_y^2) K_x^2 + 4K_x^2 K_y^2 &\neq 0 \\ K_x^2 (K_x^2 - K_y^2 + 4K_y^2) &\neq 0 \\ \text{бундан} & \\ \left\{ \begin{array}{l} K_x^2 \neq 0 \\ K_x^2 + 3K_y^2 \neq 0 \end{array} \right. & \end{aligned} \quad (1.24)$$

So, we have the following general solutions:

$$\begin{aligned} U &= U(t) + \bar{U}(t) \\ \omega &= \omega(t) + \bar{\omega}(t) \end{aligned} \quad (1.25)$$

The basic conditions are set as following in the problem:

$t = 0$

$$\begin{aligned} \dot{X}(0) &= U(0) = V_0 \cos \alpha \\ \dot{Y}(0) &= \omega(0) = V_0 \sin \alpha \\ \dot{U}(0) &= 0 \\ \dot{\omega}(0) &= 0 \end{aligned}$$

V_0 - the speed of the air current.

In the following solutions, by choosing the air speed and other particles optimally, we may choose the acceptable regime of the process.

From this:

$$\begin{cases} U(0) = C_1 \alpha^{(1)} + C_2 \alpha^{(2)} + C_3 \alpha^{(3)} + C_4 \alpha^{(4)} = V_0 \cos \alpha \\ \omega(0) = C_1 \beta^{(1)} + C_2 \beta^{(2)} + C_3 \beta^{(3)} + C_4 \beta^{(4)} = V_0 \sin \alpha \\ \dot{U}(0) = K_1 C_1 \alpha^{(1)} + K_2 C_2 \alpha^{(2)} + K_3 C_3 \alpha^{(3)} + K_4 C_4 \alpha^{(4)} = 0 \\ \dot{\omega}(0) = K_1 C_1 \beta^{(1)} + K_2 C_2 \beta^{(2)} + K_3 C_3 \beta^{(3)} + K_4 C_4 \beta^{(4)} = 0 \end{cases}$$

From these algebraic system of formulas, we will find the unchanging coefficients of one gendered differential formulas and put to the (1.25) formula.

VI. CONCLUSION AND FUTURE WORK

Structures and working processes of local and foreign machinery cleaning cotton from fine impurities have been thoroughly studied and models have been developed to improve its efficiency. It has been shown that changing the shape of piles, increasing useful surface of the net surface and ensuring that the cotton stays longer on the net surface under the influence of piled drums are necessary.

The author suggested increase in efficiency by moving cotton on the sloped net surface under the influence of its own weight. As a result, it will be possible to increase the time during which raw cotton stays on the net surface.

REFERENCES

1. A. Maxkamov, A. Karimov, "Laws of change of dynamic compressive forces acting on cotton pieces in the separator working chamber", Journal of Textile Problems. - Tashkent: TITLI, 2013, № 1, 27-29 p.
2. A. Karimov, A. Maxkamov, B. Mardonov, "Theoretical studies of the movement process of cotton wool in a vacuum valve with a deflection profile", Journal of Textile Problems. - Tashkent: TITLI, 2012, № 4, 8-12 p.
3. M.N. Salokhiddinova, R.M. Muradov, A.I. Karimov, B.M. Mardonov, "The Shortfalls of the Vacuum Valve Cotton Separator", American Journal of Science and Technology. - 2018. Vol. 5, № 4, 49-55 p.
4. M.T. Hojiev, I.Z. Abbasov, B.M. Mardonov, "Theoretical study of the motion of dust particles in the chamber of the collector", Journal of Textile Problems. - Tashkent: TITLI, 2015, № 2, 75-79 p.
5. G. Jabborov, "Technology of raw cotton processing". "Teacher", Tashkent, 1987.
6. Мардонов Б., Махкамов А., Каримов А. Пахта бўлакчаларини оғма профили вакуум-клапандаги ҳаракат жараёнини назарий тадқиқотлари. // Тўқимачилик муаммолари. 1 сон. Тошкент-2012, 8-12 б.
7. Муродов Р., Каримов Э., Обидов А., Махкамов А., Эргашев Ж. Тола ажратиш қурилмаси. // Ўзбекистон Республикаси Давлат Патент идорасига фойдали модел учун талабнома № FAP 00868, 29.07.2010.
8. Хожиев А., Дадажонов А., Махкамов А. Пахта толасини тозалаш қурилмаси. // Ўзбекистон Республикаси Давлат Патент идораси ихтирога патент № IAP03889, 18.11.2005.
9. Муродов Р., Саримсоқов О., Махкамов А. Сепаратор. // Ўзбекистон Республикаси Давлат Патент идораси ихтирога патент № IAP04363, 25.06.2008.
10. Махкамов А., Муродов Р., Каримов А. Сепаратор ишчи камерасида пахта бўлакчаларига таъсир этувчи динамик босим кучларини ўзгариш қонунятлари. // НамМТИ Республика илмий-амалий конференция тўплами. Наманган-2012.
11. Махкамов А., Каримов А., Муродов Р. Сепаратор ишчи камерасидаги кириб келувчи ва тўрли юзалардан чиқиб кетувчи ҳаво тезликлари ва ҳаво сарфини ўзгариши. // НамМТИ Республика илмий-амалий конференция тўплами. Наманган-2012.

12. Мурадов Р., Махкамов А. Совершенствование конструкции сепаратора для хлопка – сырца. // ФерПИ II Республиканская научно и научно-техничская конференция. Фергана-2010, 106-108 б.

13. Мурадов Р., Махкамов А., Обидов А. Пахта бўлакчаларини оғма профили вакуум-клапандаги ҳаракат жараёнини назарий тадқиқотлари // НамДУ илмий ахбороти I-сон. Наманган-2010, 46-49 б.

14. M.N. Salokhiddinova, R.M.Muradov, A.T. Mamatkulov, "Investigation of Separating Small Impurities and Heavy Compounds Using the Cotton Separator Equipment". American Journal of Science, Engineering and Technology. - 2017. Vol. 2, № 2, 72-76 p.

C O N T E N T S

TECHNICAL SCIENCES: COTTON, TEXTILE AND LIGHT INDUSTRY

Dustkobilov U.	
Circular economy practices in the textile industry: Current status, indicators, and development opportunities	3
Kuldashov G., Oripov J.	
Forecasting the temperature gradient of cotton revolt	10
Kuldashov G., Oripov J.	
Optoelectronic three-wave moisture meter of raw cotton	16
Umarov A.	
Research on the optimization of the saw gin's roll box	26
Tursunov A., Sharibaev N.	
Techniques and devices for mitigating environmental pollution in cotton processing industries	36
Ganikhanov Kh., Mavlyanov A., Abdusamatov A., Mirzaumidov A.	
Effect of the forces on the separation of fiber flow from the saw in an improved lower fiber removal device	43
Nurulloyeva Kh., Abdusamatov A., Mirzaumidov A.	
Experimental determination of the load on the multifaceted columns on the elastic supports of the cotton ginner	49
Muradov A.	
Study of the dynamics of the drive mechanism of moving needles	54
Ismatullayev N., Shamsiyeva M.	
Development of technology for producing leather from african catfish skins	59
Rahmatova S.	
Theoretical study of the quality indicators of newly structured knitted fabrics based on a mathematical model	65
Parpieva N., Kayumov J., Parpiyev D., Lastochkin P.	
Theory of torsional vibrations of grooved cylinders	71
Komilov Sh., Mamadaliyev N., Jurayeva G.	
Quality indicators of cotton fiber analyzed	83

TECHNICAL SCIENCES: AGRICULTURE AND FOOD TECHNOLOGIES

Sobirova M., Mohamed R., Farmonov J., Samadiy M.	
Impact of calcium chloride on the cheese yield during swiss cheese manufacturing process	91

Kurayazov Z., Ravshanov S., Kanoatov X.	
Analysis of the influence of the whitening process during preparation for flouring on the quality of bakery flour made from a mixture of wheat and rye grains	96
Xusanxodjayeva F., Meliboyev M., Ergashev O.	
Development of technology for complex processing of garlic onions	105
Meliboyev M.	
Development of complex processing technology for the secondary mass of watermelons and zucchini	112
Nishonov U., Mominov U.	
Evaluation of organoleptic properties of soft drinks prepared from plant materials	118
Khurmamatov A., Yusupova N., Sarsenbayev N., Mallabayev O.	
Results of determination of bitumen movement modes at different temperatures	124
Yusupova N., Sarsenbayev N., Mallabayev O.	
Results of improving the construction of the plate heat exchange	130

CHEMICAL SCIENCES

Jumayeva D., Zaripbaev K., Oxunjonov Z., Nomonova Z.	
Compositional analysis of raw materials in sorbent production	135
Abdumalikov A., Ummatov O., Mamajonov B., Esonkulova N., Ochilov G.	
Thermal treatment of various samples of low-molecular-weight polyethylene – a by-product of polyethylene production	145
Mamajonova M., Salixanova D., Abduraxmonov E., Ismailova M.	
Energetics of water molecule adsorption on modified bentonite surfaces	153
Abdurahimov A., Abdullayeva F., Usmonova Z.	
Infrared spectroscopic analysis of the purification of sunflower oil from waxy substances using perlite and vermiculite	160
Eshbaeva U., Gökhan Z., Bahri B.	
Theoretical foundations for ensuring the mechanical strength of papers containing collagen hydrolysates	167
Eshbaeva U.	
Research on the printing and technical properties of kraft paper incorporating "cotton cellulose-industrial waste-paculate"	172
Makhkamova D.	
Research on the separation of zinc from metallurgy waste with a mixture of ammonia and ammonium salts	181
Yuldasheva M., Makhkamova D., Turayev Z	
	188

Study of interaction of components in the H_3BO_3 – KNO_3 – H_2O system	
Juraev M., Siddikov D., Askarova O.	
Aboveground components of salvia sarawschanica	194
Davlatova O.	
Zeolite-based bimetallic composite catalysts for pyrolysis and gasification: chemical technologies for deep biofuel upgrading and conversion intensification	202
Davlatova O.	
Use of BaNaY faujasite zeolite-based bimetallic composite catalysts for deep biofuel purification and selective xylene separation	208
Shamuratova M., Giyasidinov A., Eshmetov I., Nurjanova G.	
On the study of physicochemical properties of soils in the regions of the republic	214
Hoshimov F., Lutpillayeva M.	
Optimized chemical synthesis of stable silver nanoparticles using various reducing and stabilizing agents	220
Sarimsakova N.	
Investigation of the adsorption properties of the sorbent obtained in the process of modification of clinoptilothite in the purification of natural gas from sulfur compounds	227
Kokharov M., Bakhronov Kh., Sultonov A., Jumaeva D., Jumaboeva Z., Gaybullayeva D., Abdumutalova G.	
Adsorption isotherm of hydrogen sulfide on an activated adsorbent derived from hybrid paulownia tomentosa wood	234
Ikramov M., Zakirov B.	
Optimization of the aqueous solubility of monoammonium phosphate, potassium nitrate, and magnesium nitrate via thermodynamic analysis and selective crystallization	243
Nazhimova N., Seitnazarova O.	
Study of the chemical and mineralogical composition of thermal power plant wastes	249

TECHNICAL SCIENCES: MECHANICS AND MECHANICAL ENGINEERING

Berdiev U., Hasanov F., Avazov B., Ostanayev., Viktor M.	
Study of the nature and prospects of practical application of the magnetocaloric effect in energy-efficient cooling systems	256

Sodikov T.	
Research of mechanical part of solar photovoltaic power station	263
Otamirzayev D.	
Calculation of absorption coefficient of organic dye N719 for dye-sensitive solar cell (DSSC)	270
Abdovakhidov M.	
Study on determining the bending and torsional stiffness of packaged working bodies	276
Abdovakhidov M.	
The study torsion fluctuations packet worker organ with provision for influences of the correlation longitudinal acerbity their element	280
Shodmonov J.	
Energy-integrated smart textiles: international trends and prospects for uzbekistan's research ecosystem	285
Djurayev Sh.	
Integrated genetic-differential evolution approach for simultaneous pressure-drop reduction and efficiency enhancement in multi-cyclone dust collectors	292
Mamaxanova Z.	
Technological principles for creating a suit that ensures high reliability and safety in aquatic environments	297
Pirnazarov U.	
Theoretic observation of the cotton movement in the operating camera of the new separator	306
Pirnazarov U.	
Investigation of the interaction between the moving separator screen surface and the cotton mass	315
Yusupov D., Abduraximov D., Muxammadjonov M.	
Determination of energy loss in the magnetic core of oil power transformers under long-term operation conditions	319

ADVANCED PEDAGOGICAL TECHNOLOGIES IN EDUCATION

Abdullayev X.	
Transition function of second-order element	326

ECONOMICAL SCIENCES

Isroilov R.	
Criteria, indicators and laws of small business development	331

Isroilov R.

Concept of assessment of the economic development potential of small business and its evaluation **340**

Bustonov M.

Econometric analysis of the activities of multi-sectoral farms **348**

Bustonov M.

Global digitalization: paths and problems **356**

Kadirova Kh.

Prospects for development and improvement of the mechanism of functioning of the stock market **366**
